
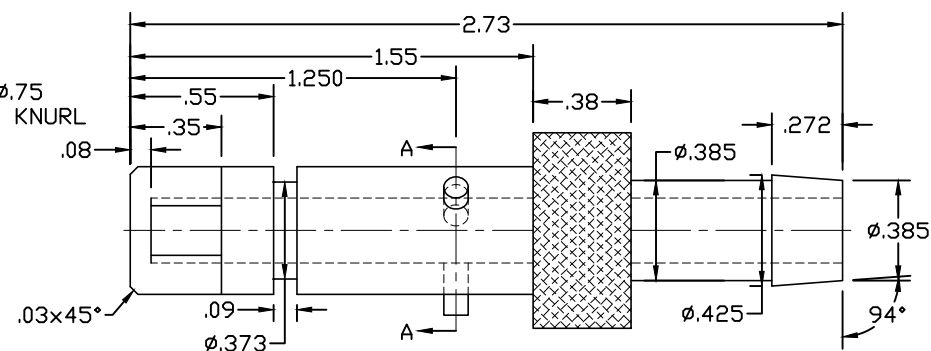
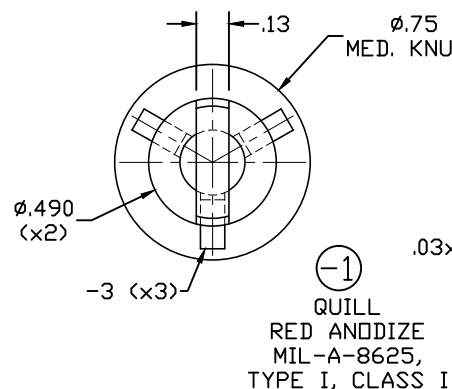
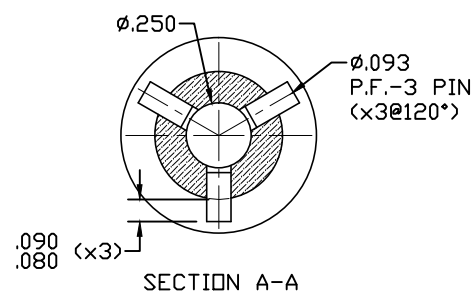


This drawing, specifications, and concepts contained herein are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISIONS			
REV	DESCRIPTION	DATE	INITIAL
-	-	-	-

UNDER REVIEW

URF 19-1131 19.10.30 (VM)

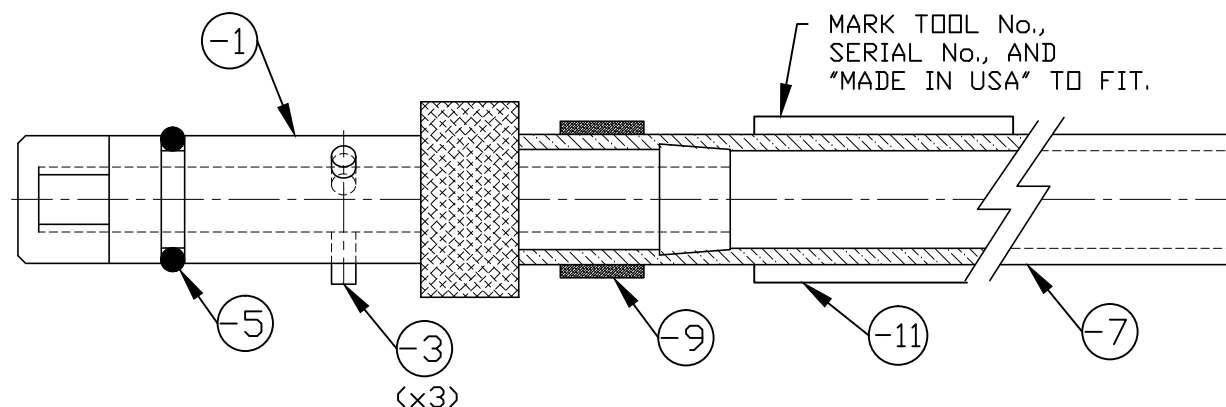

RED BARN MACHINE

TITLE			
DRAIN TOOL			
DWG NO.			REV
RB DB3228			-
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN BY: PERRITT	
TOLERANCES IN:		APPROVED	
DECIMALS		HEAT TREAT	
.XXX ± .005		FINISH	
XX ± .01		SPEC	
X ± .1		RED ANODIZE	
FRACTIONS ± 1/32		USED ON MODEL	
ANGLES ± 5°			
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING			
SCALE		DATE	
NTS		12-3-09	
SHEET		1 of 1	

ASSY QTY	QTY	B/D	PART #	UNIT QTY	DESCRIPTION	MATERIAL	B/D INFORMATION OR SPECIFICATIONS
			-1	1	QUILL	6061 RND. BAR	Ø7/8 x 3
		B/D	-3	3	DOWEL PIN	S.S.	Ø3/32 x 3/16
		B/D	-5	1	O-RING	VITON	2-012 OR MCMASTER-CARR #5267T23
		B/D	-7	1	HOSE	VINYL	Ø1/2 O.D. x Ø3/8 I.D. x 6 ft. KURI-TECH #K010-0608
		B/D	-9	1	CRIMP HOSE CLAMP	S.S.	Ø3/8 DIXON VALVE #1315
		B/D	-11	1	SHRINK WRAP FOR TOOL No.		Ø3/8 x 1-1/2
ASSY #							